



Wi-Fi ready

LASER Series 6000

High-end diameter measurement for wire rod, bar and tube processing lines



LASER Series 6000

High-end diameter measurement for wire rod, bar and tube processing lines



Wi-Fi ready



LASER Series 6000 for high-end diameter measurement in the area Non Destructive Testing (NDT)

The innovative LASER Series 6000 opens up a new era of precision diameter measurement. The LASER Series 6000 devices expand SIKORA's current range of intelligent diameter gauges with three high-end models. They unify the intelligent design with the highest precision and reliability.

Up to 5,000 measurements per second and axis, all with extremely high single value precision, enable an optimum line control, provide reliable statistical data, and allow the detection of lumps and neckdowns at the same time. The SIKORA gauge heads measure the diameter of tubes, wire rods and bars with impressive precision and repeatability. Three gauge head models cover product diameters from 0.2 to 78 mm.

Integrated display in the gauge head

The devices include an integrated LCD display that provides the operator with diameter values at one glance, directly at the measuring device.

Typical features

- Innovative CCD line sensor technology combined with pulse controlled laser diodes
- Measures tubes, wire rods and bars with impressive precision
- Up to 5,000 measurements per second/axis
- Integrated lump detection function
- Integrated LCD display
- Universal interface module for all current fieldbus connections
- Optimum installation and protection of connection cables
- Wi-Fi interface
- Two-year warranty



LASER 6020 XY with integrated display

Lump detector function

The high measuring rate of the diameter measuring devices also permits the detection of lumps and neckdowns. With the two-in-one system, investment costs are reduced. In addition, there is more space in the line as only one gauge head has to be installed.

Functional design in perfection

A special feature of the LASER Series 6000 is the swivel type gauge head. It allows for the gauge head to be easily moved up and out of the line. The measuring heads are open at the bottom to prevent dirt and water from falling easily into the measuring plane. The feeding of the connection cables to the interface module is protected against water, dirt and mechanical influences, directly in the gauge head stand.


The opening range of the gauge is twice as large as the measuring range, for an easy and safe passage of the product and possible joints.

Interfaces + Industry 4.0

A universal interface module is directly integrated into the gauge head for any connections such as RS485, RS232, Profibus-DP or alternatively an industrial fieldbus such as Profinet IO, EtherNet/IP, CANopen, DeviceNet or OPC UA. With these interfaces, the device series is best equipped under the aspect of "Industry 4.0".

Wi-Fi interface

The LASER Series 6000 has an optional Wi-Fi interface for direct communication with a smartphone or laptop. The Wi-Fi interface transmits measuring values, trend and statistical data as well as video signals for diagnosis and quality control.

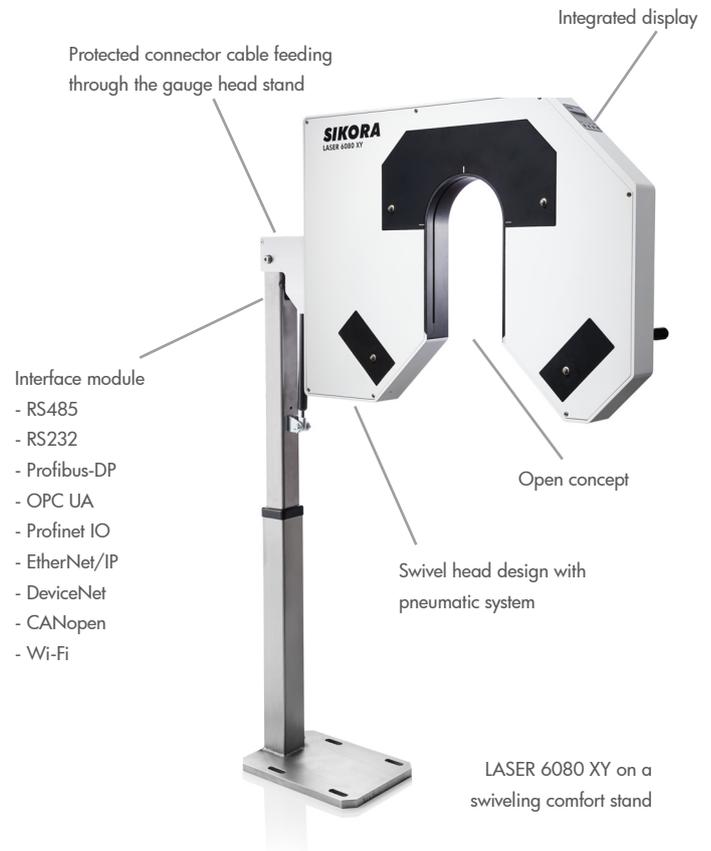

LASER Series 6000

High-end diameter measurement for wire rod, bar and tube processing lines



Certified according to
DIN EN ISO 9001

Technical Data LASER Series 6000

Product Name	Product Diameter	Accuracy*	Repeatability	Exposure Time	Dimensions
LASER 6020 XY	0.2 - 18 mm	± 0.2 µm	± 0.1 µm	0.2 µs	345 x 200 x 65 mm
LASER 6040 XY	0.5 - 38 mm	± 0.5 µm	± 0.2 µm	0.2 µs	420 x 290 x 65 mm
LASER 6080 XY	1.0 - 78 mm	± 1.0 µm	± 0.5 µm	0.2 µs	535 x 705 x 65 mm

Measuring Rate
2,500 measurements/sec/axis
5,000 measurements/sec/axis for LASER 6020 XY (optional)

Permissible Environs Temperature
+ 5 to + 50 °C

Interfaces
RS485, RS232, LAN
Optional: Wi-Fi, analog output or alternatively industrial fieldbus (e.g. Profinet IO, EtherNet/IP, Profibus-DP, CANopen, DeviceNet, OPC UA)

Power Supply
100 - 240 V AC ± 10 %, 50/60 Hz, 30 VA

* ± 0.01 % of measuring value

Technical data is subject to change

SIKORA AG (Headquarters)
Bruchweide 2
28307 Bremen
Germany
Ph.: +49 421 48900 0
email: sales@sikora.net

www.sikora.net

BRAZIL
sales@sikora-brazil.com

CHINA
sales@sikora-china.com

FRANCE
sales@sikora-france.com

INDIA
sales@sikora-india.com

ITALY
sales@sikora-italia.com

JAPAN
sales@sikora-japan.com

KOREA
sales@sikora-korea.com

MALAYSIA
sales@sikora-sea.com

MEXICO
sales@sikora-mexico.com

RUSSIA
sales@sikora-russia.com

TURKEY
sales@sikora-turkey.com

UKRAINE
sales@sikora-ukraine.com

UNITED ARAB EMIRATES
sales@sikora-uae.com

USA
sales@sikora-usa.com